


## Product information

REV2015204

# JAMPAK Installation-Kit

### Description:

- **1 - Hydraulic JAMPAK Injection Gun**  
rated to 10,000 psi (700 bar) with specially modified funneled end cap for easier flow of compounds, including 4 oz. can of hydraulic fluid, 3/8" X 12" hose, JIC fittings .
- **JAMPAK 27 injectable packing:**  
1x 1 kg tin, plus 2 sticks (250 g each)
- **1 - 24" Teadit Seal-Cage**  
for packing cross-section of your choice: 3/8", 7/16", 1/2", 9/16", 5/8" or 3/4" (bigger sizes on request only)
- **1 - Master pin-pack**  
Brass pins to adjust seal-cage height:  
12 pins each in 1 1/4", 1 1/2", 1 5/8",  
1 7/8" and 2" length
- **1-Mitre-Box**  
with saw & knife (for precise and straight cutting of seal cage)
- **1 - Sure-Cut packing cutter**  
(for cutting packings with 45 ° or 90 ° cut)
- **1 - Sure-Cut maintenance kit**  
with replacement blade and ceramic pocket sharpener
- **1 - Packing tamping-tool set:**  
1 - 5/16" Delrin® rod with easy grip  
1 - 3/8" Delrin® rod with easy grip
- **1 - Packing extraction-hook set:**  
1 - 3/16" stainless steel hook with easy grip  
1 - 1/4" stainless steel hook with easy grip
- **1 - Packing extractor:**  
To facilitate removal of used packing rings and Seal-Cage
- **1 - Jampak Installation CD-Rom**  
with text, pictures, videos and sound

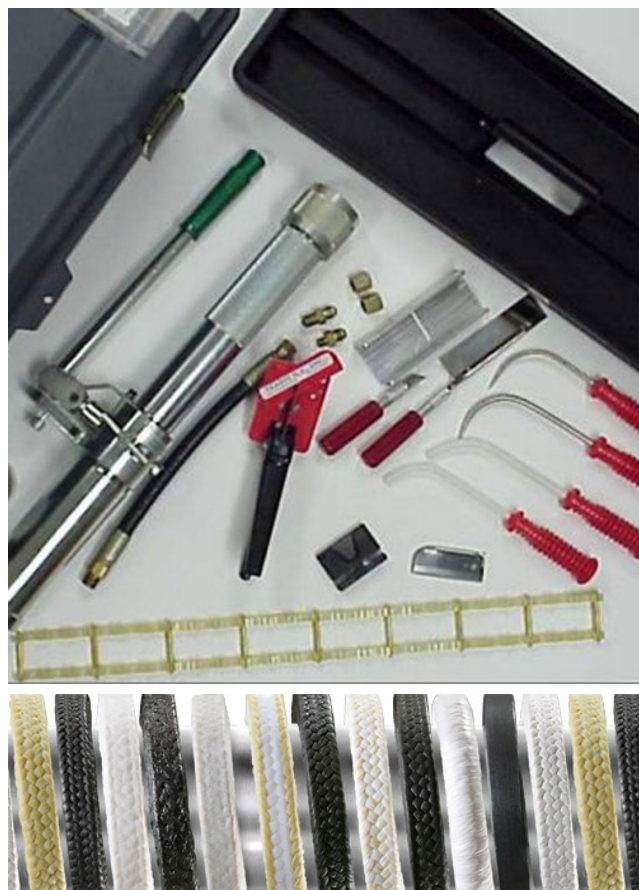

- **1 - Heavy-duty 26" Transport-Box:**  
complete with "grab 'n go" utility boxes, removable inner tray, etc.

The TEADIT JAMPAK installation kit contains everything one needs to successfully install the JAMPAK system. All that is additionally needed is a few metres of braided packing in the correct cross-section, to be used as top and bottom rings on the outside of the Seal-Cage.

Please do not hesitate to ask your TEADIT representative for more details.

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.

TEADIT INT. - Rosenheimer Str. 10, 6330 Kufstein, AUSTRIA, Tel.: +43-5372-64020-0, Fax: +43-5372-64020-20, [austria@teadit.eu](mailto:austria@teadit.eu), [www.teadit.eu](http://www.teadit.eu)  
TEADIT Deutschland - Schanzenstr. 35, 51063 Cologne, GERMANY, Tel.: +49-221-922 342-0, Fax: +49-221-922 342-22, [germany@teadit.eu](mailto:germany@teadit.eu)